


To make you own living room PC.

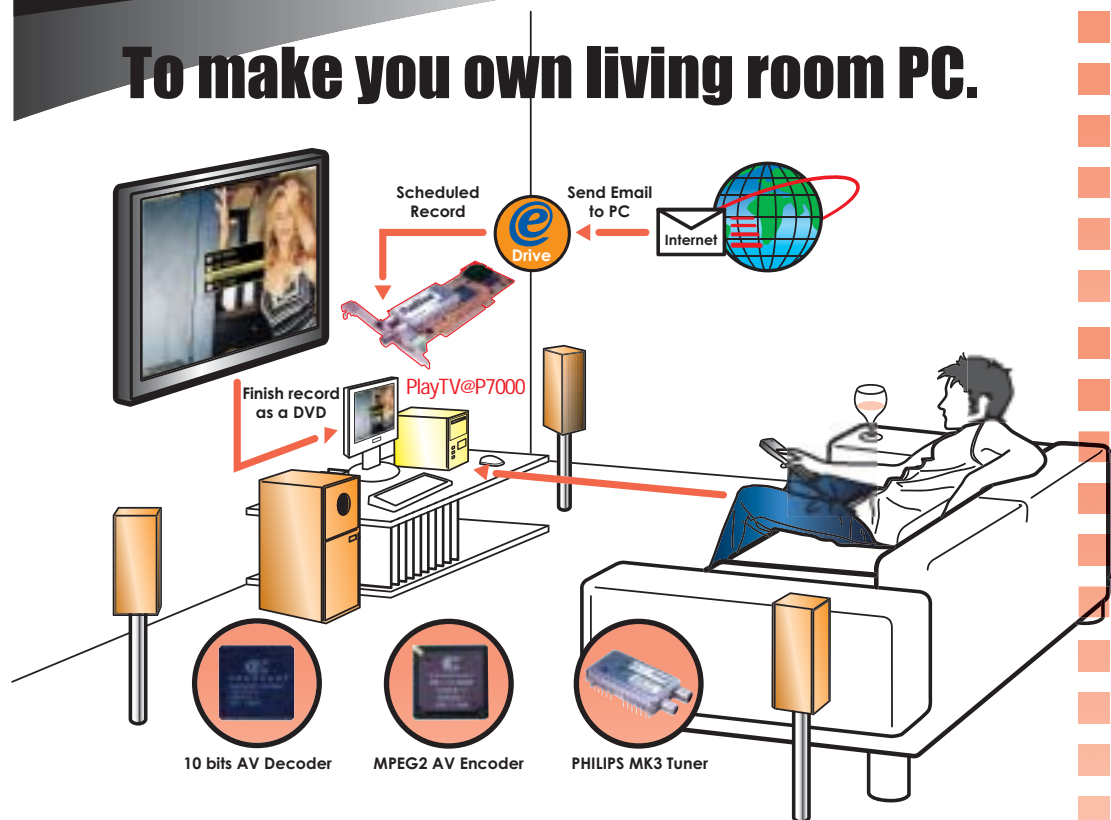

What's eDrive ?

Anywhere you are, you can scheduled record TV as DVD via Email. To learn how to operate this functionality, please refer user manual for instructions and examples.

Specification

TV Tuner	TV channel	Full channel for 181 channel
	TV Sound	Stereo / Bilingual
	TV-RF Input	75ohm F/IEC Type connector
	FM-RF Input	75ohm F/IEC Type connector
Video	Composite-Video	RCA Pin
	S-Video	Mini Din 7Pin
Audio	Line In	Female Phone Jack
MPEG Compression	Video Bit Rate	MPEG2 Full D1: 2 - 15Mbps(VBR,CBR)
	Audio Bit Rate	224Kbps
	Sampling Rate	44.1KHz, 48KHz
Frame Size		720 x 576 (PAL) / 720 x 480 (NTSC)
Board Size		167.0 mm x 64.7mm

System Requirements

- 600-MHz processor or faster
- Microsoft® Windows® 2000, and XP
- 128 MB RAM
- 250 MB free disk space for applications
- 20 GB or above free disk space for DVD/MPEG2 record (Recommended)
- Approximately 450 MB for every 10 minutes of captured video
- Video card and monitor that support 16-bit color or above
- Sound card
- CD-ROM drive
- CD-Recorder or DVD-Recorder
- Available PCI slot
- Analog video source device(s), such as a television, camcorder, or videotape deck

Package Contents

- HardWare MPEG2 PCI TV tuner Card
- Quick Installation Guide
- Bundle Software CD
- Driver/Application CD
- S-Video to Composite video Cable
- FM Radio Receiver Cable
- IR sensor receiver cable (mini jack)
- Remote Control

PixelView Media Centre

My TV



My FM



My Browser



My DVD

